

'Bob the Blindman'

Quality, Value and Service

how to fit and care for your **woodweave blind**

IN ORDER TO KEEP YOUR BLIND SAFE IN TRANSIT, THE BRACKETS ARE PACKED SEPARATELY AND ENCLOSED AT ONE END OF THE BOX. PLEASE CHECK THOROUGHLY BEFORE DISCARDING ANY PACKAGING.

aftercare

To ensure your Woodweave blind stays looking its best for many years to come, follow the straightforward operating and cleaning instructions below:

Operating Instructions

- To raise the blind, pull the cords down until the blind reaches your desired height.
- To lower the blind, pull the cords across the face of the blind to release the cordlock and carefully let the cords slide through your fingers.

Cleaning

- Regular and careful vacuuming using the brush attachment is all that's required to keep Woodweave blinds looking their best.

WARNING

IN THE INTEREST OF SAFETY, PLEASE KEEP ALL PULL CORDS AND CHAINS OUT OF THE REACH OF CHILDREN. MOVE COTS, BEDS AND OTHER FURNITURE AWAY FROM BLINDS AND INSTALL SAFETY DEVICES SUCH AS CLEATS AND CORD TIDIES TO LIMIT ACCESS TO CORDS.

woodweave blinds

fitting instructions

fittings

- 1** Brackets:
quantity to suit
length of blind



- 2** Wood screws:
min 4



- 3** Screws: min 4
Rawl plugs:
min 4



- 4** Blind: 1



Outside Recess

If fitting the blind outside the window, measurements **(C)** will need to be the same. To work out **(C)**, simply minus **(B)** from **(A)** and divide the answer by two. Follow instructions for FACE FIXING

Inside recess

Decide whether to FACE or TOP FIX. FACE FIX to fit the bracket to the window frame. TOP FIX to the Intel if the window frame is uPVC, or if there are any obstructions, e.g. window handles.



TOP FIX FACE FIX

Place blind in fitting position. Space the brackets evenly




Possible bracket positioning

step two

Top Fixing

Measure the distance that any handles protrude from the frame, **A**. Mark this measurement on the intel and use it to position the back of the bracket.

Choose one of the slots cut into the headrail closest to the cordlock and measure the distance from the end of the blind. Use this dimension as a guide to the bracket position and fix a bracket. Repeat the process using a slot that's a similar distance from the other side of the blind.

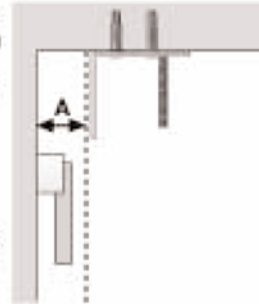

Face Fixing

Choose one of the slots cut into the headrail closest to the cordlock and measure the distance from the end of the blind. Use this dimension as a guide to the bracket position, and fix a bracket. Repeat the process using a slot that's a similar distance from the other side of the blind.



step one

Offer the blind up to the brackets ensuring the locating pin shows through the slots, and attach wing nut while supporting the blind.




step four

step three

To raise the blind, pull the cords down until the blind reaches your desired height.

To lower the blind, pull the cords across the face of the blind to release the cordlock and carefully let the cords slide through your fingers.

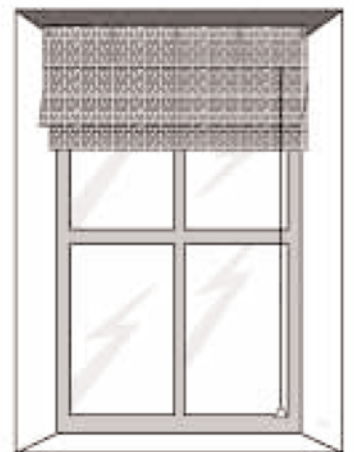

step five

If you would like more information or help with fitting your blind, please call **0800 783 7001** 9am - 6pm Monday to Saturday.